

本册版权所有，不得翻印及影射。
All rights no part of this publication can be reproduced.



香港鴻信鋼具工程有限公司
HORIZON STEEL FURNITURE FACTORY LTD
地址：香港柴灣新業街8號八號商業廣場24樓2408室
Add:Rm2408,24/F, 8 Comm.Tower,8 Sun Yip Street,Chaiwan,H.K.

東莞浩順五金家具有限公司
DONGGUAN HORIZON STEEL FURNITURE FACTORY LTD
地址：東莞市謝崗鎮銀湖工業園銀泰二路
Add:Yin Hu Industrial Zone,Xiegang Town,Dongguan City,China

武漢浩順家具有限公司
WUHAN HORIZON STEEL FURNITURE FACTORY LTD
地址：武漢市江漢區淮海路泛海國際SOHO城1棟1單元709室
Add:Rm709, 7/F, Block 1, Fanhai International SOHO City, Huaihai Road,
Jianghan District, Wuhan,China.

T 852-2881 0203
F 852-2881 0209

T 86-769-8211 1828
F 86-769-8211 1812


T 86-27-8362 6656
F 86-27-8362 8658



MOBILE FILING SYSTEM OFFICE FURNITURE



HORIZON DESIGN

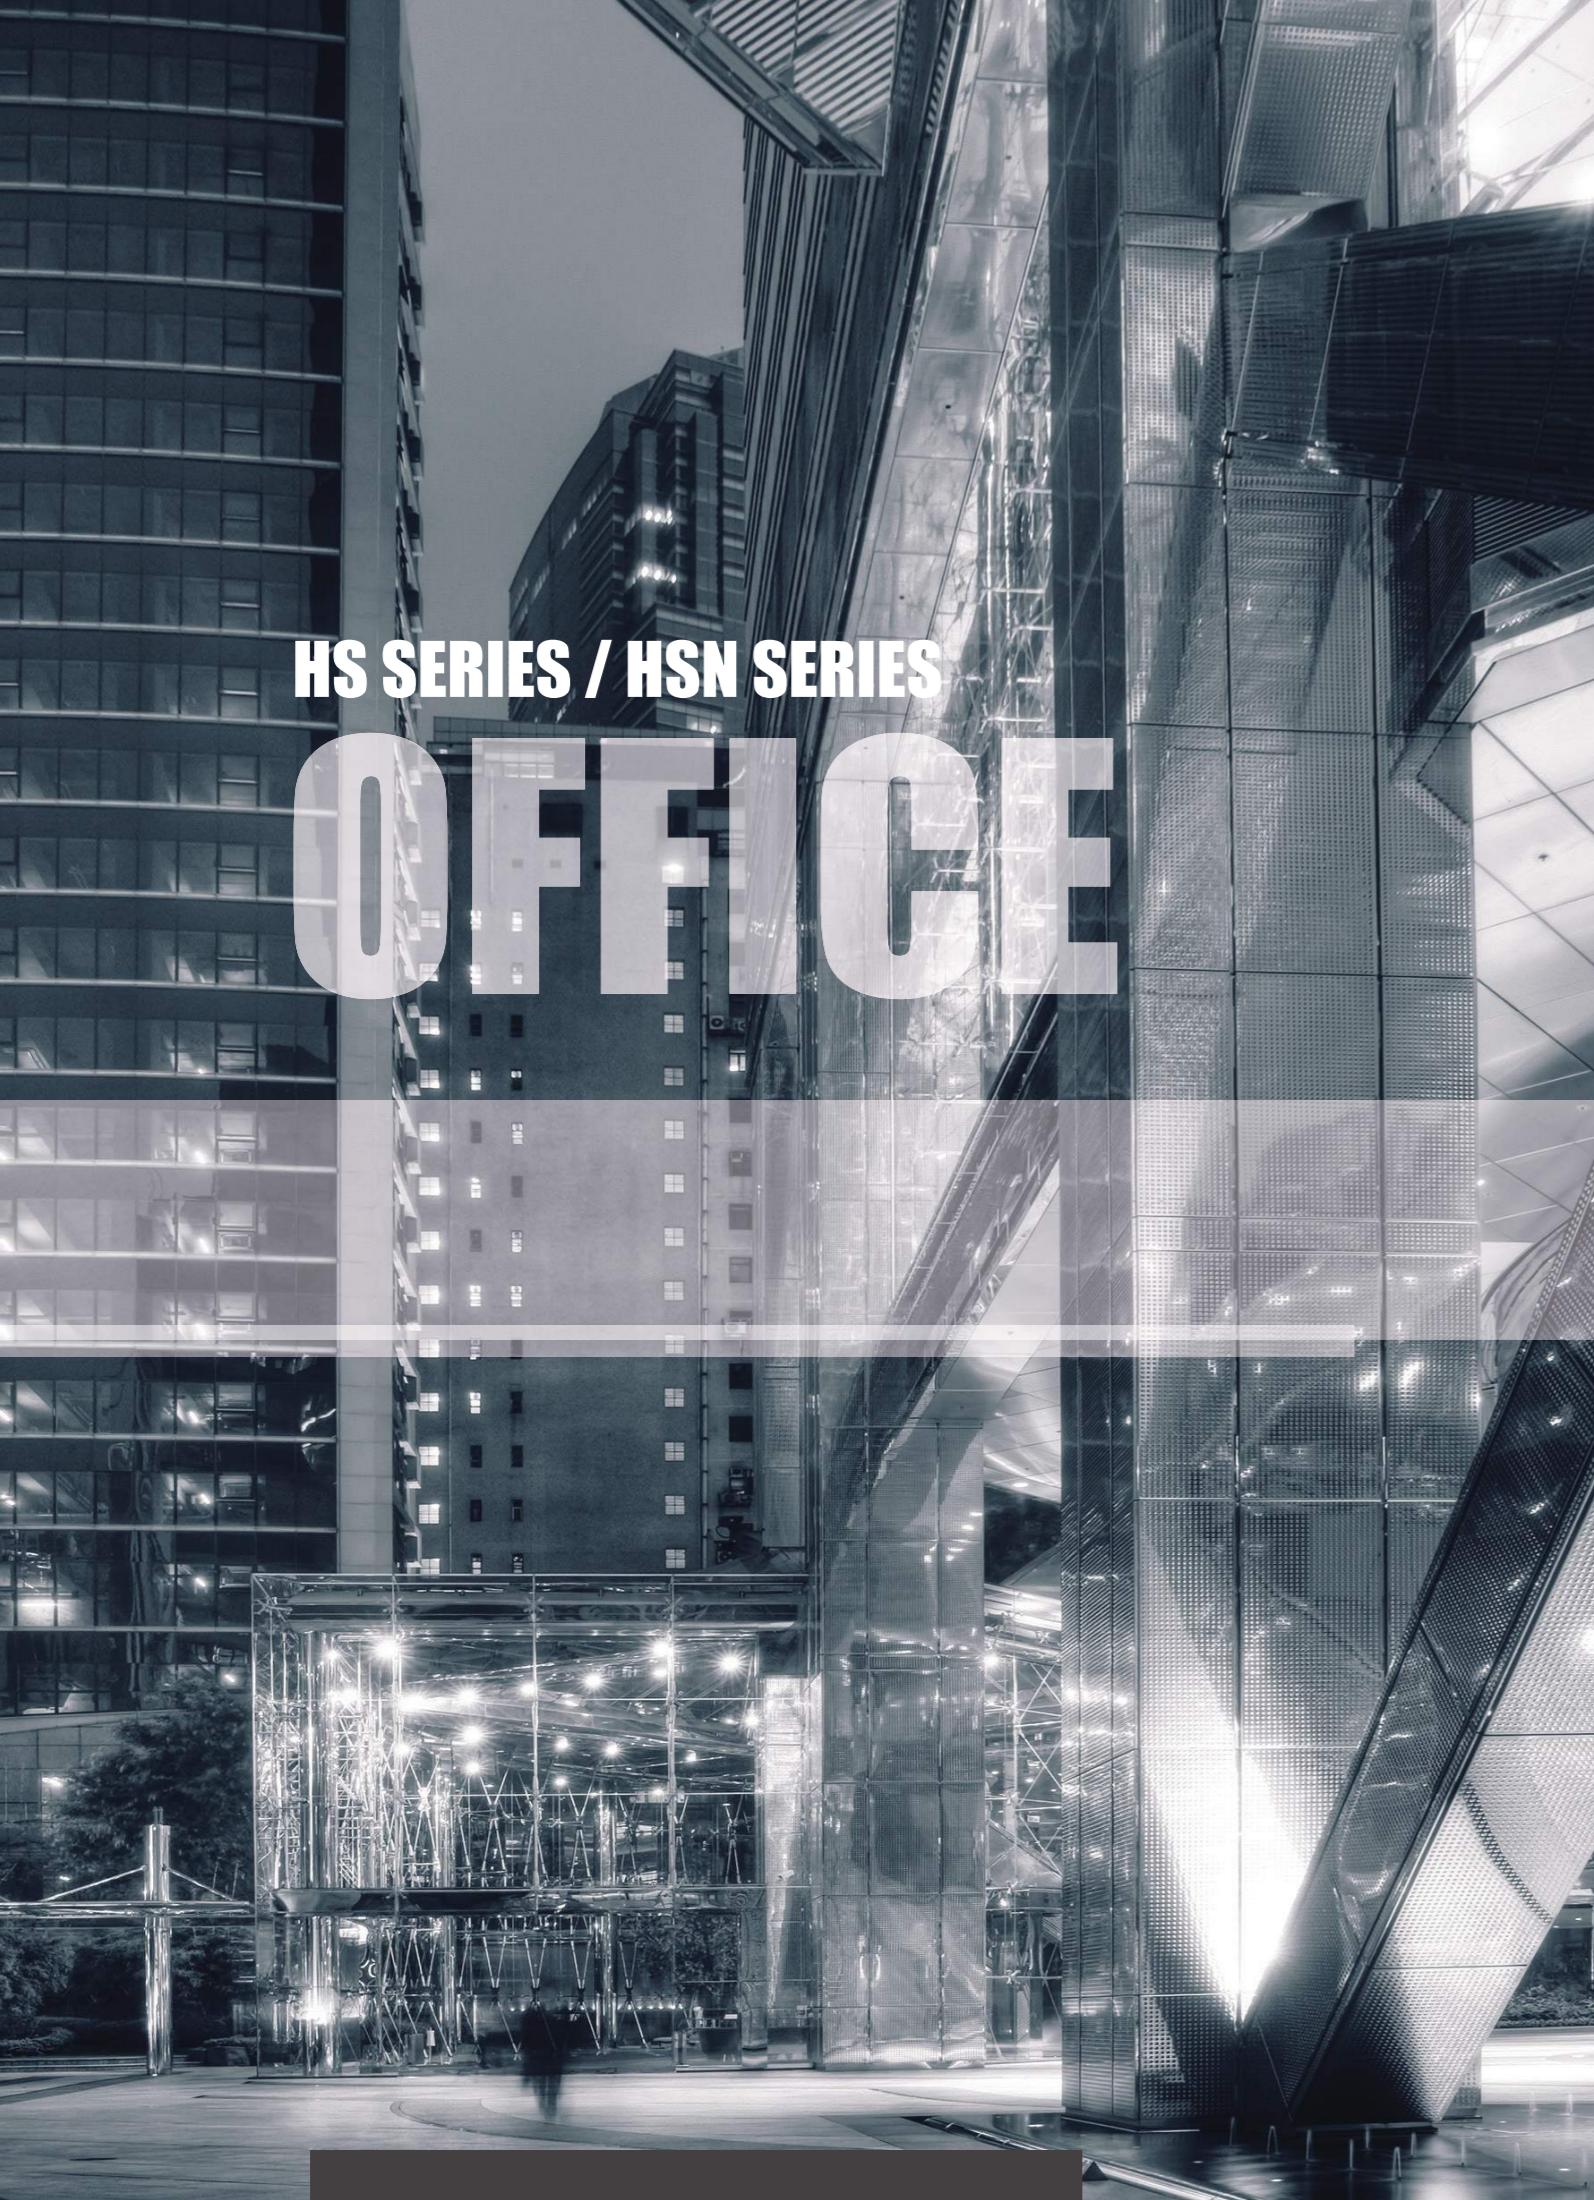

HS SERIES / HSN SERIES

OFFICE

HS SERIES / HSN SERIES

MANUAL & MECHANICAL
KNOCK-DOWN TYPE

隨着社會的進步，商業發展迅速，各行各業對儲存文件，檔案，書籍的需求亦不斷增加，而當一般傳統的辦公室文件櫃不能滿足現在儲存量要求的時候，為了減少因儲存所佔用的地方，可利用最少的空間，存放最大量的物件，“移動密集櫃”將會成為一個潮流，一個作為大量儲存的不二之選……

With the continuous advancement of the society and rapid commercial development, the demand for every industry to store documents, files and books has been increasing. The storage capacity of traditional office file cabinet cannot meet the present requirements. In order to reduce the area occupied by storage and maximize the space to keep a larger number of articles, 'mobile filing system' will become a new trend and the perfect choice.







WHEEL HANDLE
轉盤



SAFETY LOCK
安全鎖

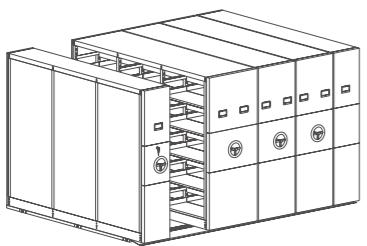

DRAWINGS 立體圖



DRAWINGS 平面圖

HS MECHANICAL TYPE

大直徑的操控可令操作變得輕鬆，重型的合金滑輪，能確保移動櫃在巨大的承重力下，依然運作暢順。

The large diameter steering wheel allow easy control. Heavy duty runner and bearing ensure the system to work perfectly under heavy loaded condition.




HSN MECHANICAL TYPE

所有移動櫃配備安全鎖，可避免因為移動櫃通道內的盲點造成意外，使用者可以安全地使用櫃內的空間，多路軌式設計，使系統運作得更安全，更穩定和流暢。


All mobile cabinets are installed with safety locks which can avoid accidents in the blind spot of the cabinet aisle. Can ensure the safety of users while using the cabinet inside the aisle. The multi-rail design can increase the safety and stability of the whole system.



ALUMINIUM SIDE COLUMNS
鋁合金邊柱

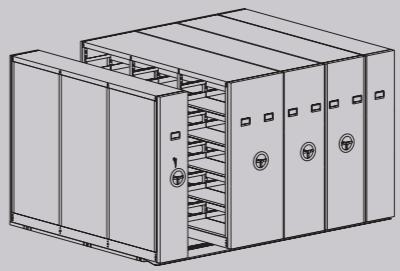

DRAWINGS 立體圖




DRAWINGS 平面圖


HS MANUAL TYPE

HS 系列內傳統的三件式面板設計，能作出不同顏色的配搭，來配合不同空間的環境設計需要。


The HS series traditional three-piece panel design allow different color combinations, designed to meet the needs of different environments.

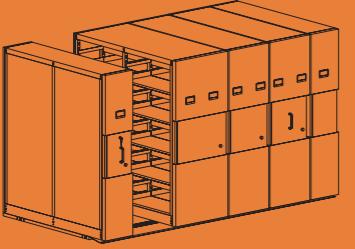


DRAWINGS 立體圖

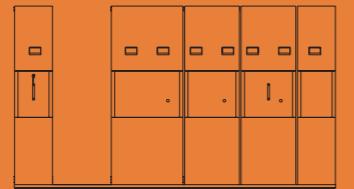

DRAWINGS 平面圖



HS-AC-MC-HANDLE
拉手




AISLE SAFETY LOCK
通道安全鎖




HSN MANUAL TYPE

HSN 系列裏獨特的鋁合金邊柱，流線形的外觀加上各種顏色配合，可突出不同的辦公室格調。

HSN series has unique aluminum side columns with streamlined appearance that can match with a variety of colors and highlight the different office style.



DRAWINGS 立體圖



DRAWINGS 平面圖



U SHAPE ALUMINIUM HANDLE
U型鋁合金拉手



AISLE SAFETY LOCK
通道安全鎖

ACCESSORIES OF MOBILE FILING CABINET

配件



HS-AC-SH-45/85-M
HS-AC-SH-65-M
Plain Shelf For Hanger File
層板下可掛快勞



HS-AC-PD-45/85-M
HS-AC-PD-65-M
Drawer
拉斗




HS-AC-HT-45/85-M
HS-AC-HT-65-M
Hanger Tube
掛通



HS-AC-IH
Index Holder
目錄座



HS-AC-PS-45/85-M
HS-AC-PS-65-M
Pull-Out Shelf
拉板（全件拉）

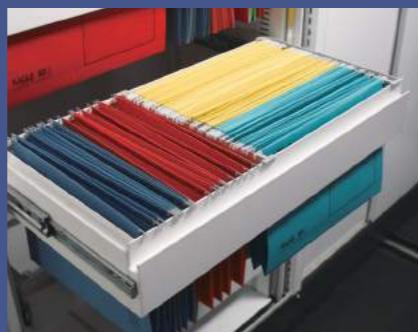

HS-AC-PF-45/85-M
HS-AC-PF-65-M
Pull-Out Frame
拉架



DOOR OF MOBILE FILING CABINET

門板



HS-AC-DR-SW
雙掩門



HS-AC-DR-SL
雙移門

RAIL POSITION DRAWING

路軌平臺

HS-PLATFORM 平臺



HS-RAIL 路軌




HS-AC-SPL 斜臺




TRACK LOCATION MAP

路軌位置圖


1 BAY
連

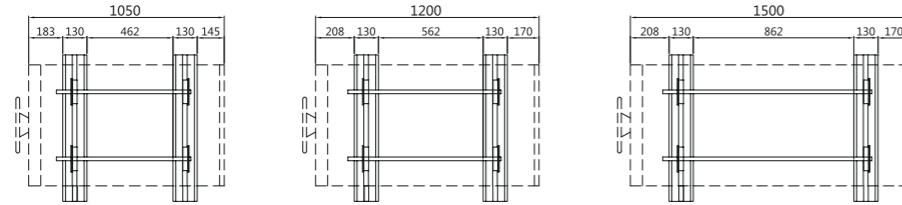


2 BAY
連

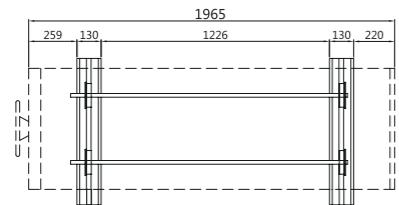


3 BAY
連

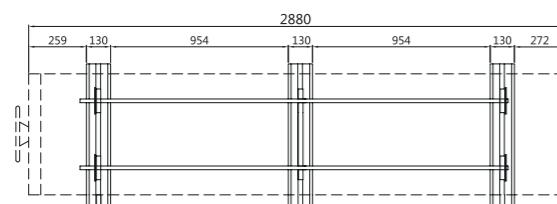


4 BAY
連

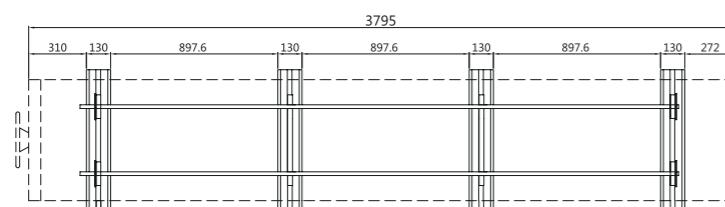

5 BAY
連

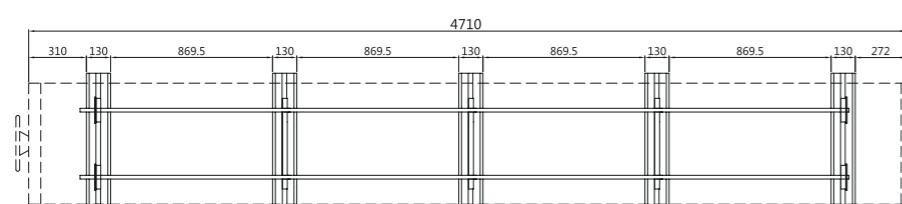


6 BAY
連

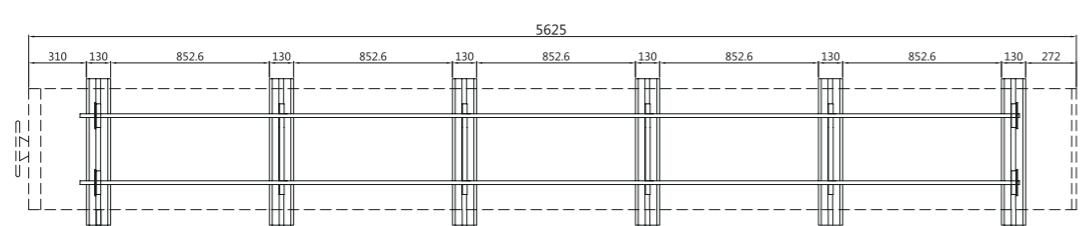


TRANSMISSION AND RAIL INSTALLATION SPECIFICATIONS

傳動機構及路軌安裝規範

傳動機示意圖

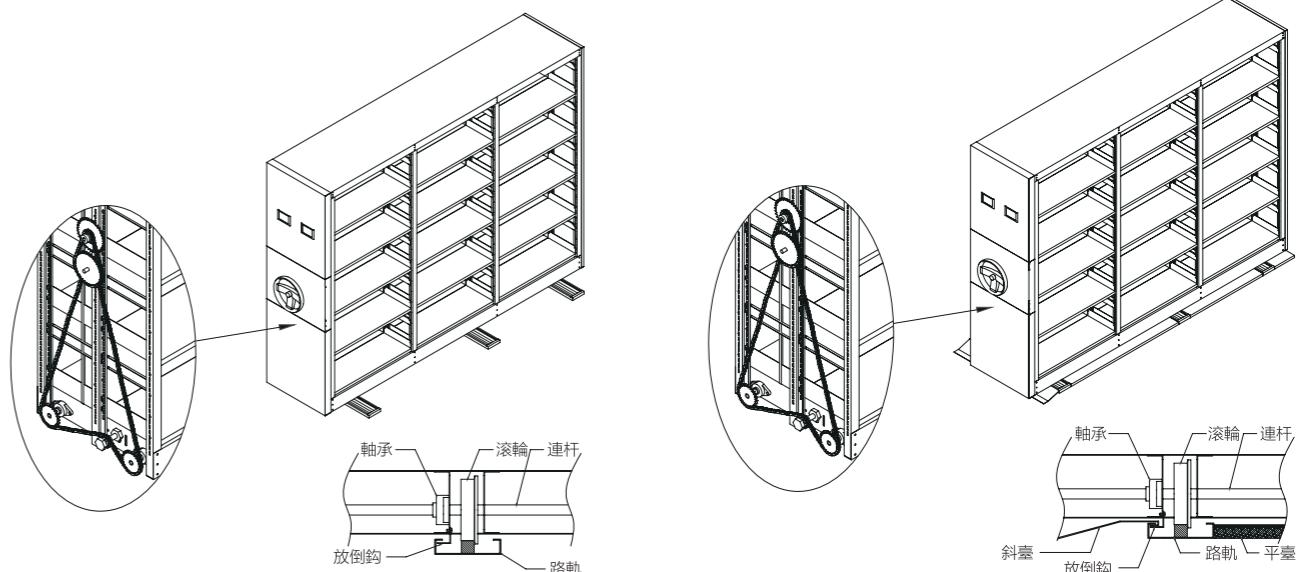

防傾倒裝置示意圖

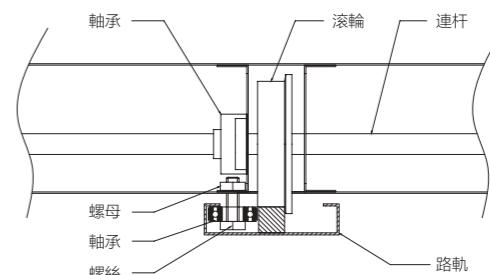

1. 傳動系統集中于移動底架，采用高強度多副組合輪架用M8螺絲緊固，將軸承座緊固在軸承座孔內，在軸承內注入潤滑油後嵌入軸承座內，再進行油封，使軸承內潤滑油長期使用不易風乾，以達到省力作用和移動平穩性。

2. 根據機械傳動原理，櫃體每一聯下部均需一根實心路軌承載（例：三聯三根路軌，四聯四根路軌，以此類推。）即增大了樓層受力面積，減少局部受力強度，又在高速傳動中起到力臂最短，平順性更強的作用。

3. 傳動系統是由手搖轉盤給力到齒輪，再與工業鏈條嚙合，運用分力裝置，中軸傳動、雙軸驅動，架體兩端受力均勻，在承載受力時能保持架體的平穩移動。

4. 路軌安裝：兩根導軌水平高度偏差不大於1.0mm/m，全長不大於2.0mm。兩條導軌寬度之間的平行度偏差不大於1.0mm/m，全長不大於2.0mm。

1. The main drive system, built in moveable underframe, is made up of several sets of high-strength combined wheel carriers, with bearing block fastened to bearing block by M8 screws. The bearings are filled with lubricating oil and closed with oil seal to avoid air drying lubricating oil, save labor and ensure smooth transmission.

2. According to the principle of mechanical transmission, the cabinet needs to be supported by solid rails, i.e. one solid rails for one section (e.g. three solid rails are required for cabinet composing three sections, four solid rails are required for cabinet composing four sections, and so forth). The solid rails help to increase stressed area of the floor and decrease stress intensity on certain part of the floor. Moreover, these solid rails minimize arm of force and ensure smooth-going during high-speed transmission.

3. The drive system runs from hand turntable, wheel gear to industrial chain, and then the driving force is distributed by centrale shaft and double shaft to ensure even stress and smooth movement of the frame.

4. Installation instructions: the height difference between two adjacent rails should be no more than 1.0mm/m, and that between the first and last rail should be no more than 2.0mm. The parallel misalignment between two adjacent rails should be no more than 1.0mm/m, and that between the first and last rail should be no more than 2.0mm.

SPECIFICATIONS OF MOBILE FILING CABINET

活動組合文件櫃規格表

TYPES 類別:	MANUAL 手動式	MECHANICAL WHEEL 機械轉盤式
MATERIAL 材料:	Japanese Electrolytic Galvanized Steel 日本電解板鐵片	
FINISH 表面塗層:	Epoxy Powder Coating 靜電噴塗塗層	
DIMENSION 尺寸:	WIDTH 寬度:	915n+135mm
	HEIGHT 高度:	2160mm
	DEPTH 深度:	Fixed Unit 固定櫃: 450mm ; Movable Unit 活動櫃: 450/650/850mm
SHELF SIZE 層板尺寸:	W865 x D410 x H25mm(for 450/850) ; W865 x D305 x H25mm(for 650)	
NO.OF SHELF 層板數量:	Single Fixed 單面固定 /Single Movable 單面活動 =4n ; Double Movable 雙面活動 =8n	
LOADING PER SHELF: 層板承重:	Reinforced Shelf 加強活動層板: D305mm/85kg ; D410mm/100kg Multi-purpose Shelf 多用途活動層板: D410mm/70kg	
NET WEI- GHT: 淨重:	SINGLE FIXED: 單面固定:	49(n-1)+92 kg
	SINGLE MOVABLE: 單面活動:	55(n-1)+115 kg
	DOUBLE MOVABLE(650): 雙面活動 (650)	65(n-1)+138 kg (貨架式) 75(n-1)+138 kg (貨櫃式)
	DOUBLE MOVABLE(850): 雙面活動 (850)	76(n-1)+153 kg (貨架式) 86(n-1)+153 kg (貨櫃式)
NO.OF RAILS 路軌數量:	1-2 Bays 聯: 2pcs 條 3-8 Bays 聯: 每聯下均有一條路軌	
AISLE SIZE 通道尺寸:	600-900mm	
MATERIAL THICKNESS: 材料厚度:	Base 底架: 2mm Back Panel 背板: 0.8mm Rail 路軌: 1.5mm Top Panel 頂板: 1mm Shelf 層板: 1mm Post 支柱: 1.5mm Side panel 側板: 0.9mm	
LOCK 鎖:	Zinc alloy die casting(ZDC)handle with Nickel-chromium(ZCr)plating finish 鋅合金鑄造拉手，表面鍍鎳鉻層	
POST 支柱:	U-shaped post of double plate with slots in 26mm increment “U”形支柱兩旁衝 26mm 連排孔	
BUMPER 防撞膠墊:	Natural rubber of Φ30 x 16mm 直徑 30 x 16mm 天然橡膠	
RAIL 路軌:	Made of 25mm concrete steel with 0.8mm stainless steel sheet coating 采用 25mm 實心鋼鐵材料，鋼鐵外包 0.8mm 304 不銹鋼	
WHEEL 軸承:	Iron die casting with anti-rust zinc coating 生鐵鑄造，表面鍍防锈鋅層 Loading 負重: 1000kg/wheel 軸承	

Remarks:n=Number of bay 備註: n= 聯數

COLOR OF MOBILE FILING CABINET

活動組合櫃色板

HORIZON office furniture design has a wide range of surface color coatings to choose from (matte, light, metallic or patterned). Color can even be different on the same unit. Apart from optimizing office space, the unit can also give your office a distinctive new look.

